

# AXIAL MOTOR MOTOR EXTRACTOR


# EasyCold

## TECHNICAL DATA SHEET / FICHA TÉCNICA

### TECHNICAL DATA / DATOS TÉCNICOS

MODEL	VOLTAGE	CURRENT	WATTS	SPEED	AIR VOLUME		WORK TEMPERATURA		NOISE	CAPACITANCE	INSULATION CLASS	WEIGHT	
Modelo	Voltaje	Corriente	Vatios	Velocidad	Caudal de Aire		Temperatura de Trabajo		Nivel de Ruido	Capacitancia	Clase de Aislamiento	Peso	
	V/Ph/Hz	Amp	W	r/min	m <sup>3</sup> /hr	CFM	°F	°C	db	µF		Kg	lb
YWF4E-250S	220/1/50	0.25 ± 10%	55	1400	750 (10Pa)	441	-22°F to 140°F	-30°C a 60°C	55	---	F	3,0	6,6
	220/1/60	0.3 ± 10%	68	1620	800 (10Pa)	470	-22°F to 140°F	-30°C a 60°C	56	---	F	3,0	6,6
YWF4E-300S	220/1/50	0.42 ± 10%	90	1350	1600 (10Pa)	942	-22°F to 140°F	-30°C a 60°C	56	---	F	3,8	8,4
	220/1/60	0.51 ± 10%	115	1600	1700 (10Pa)	1001	-22°F to 140°F	-30°C a 60°C	58	---	F	3,8	8,4
YWF4E-350S	220/1/50	0.60 ± 10%	135	1380	2250 (15Pa)	1324	-22°F to 140°F	-30°C a 60°C	60	---	F	5,8	12,8
	220/1/60	0.83 ± 10%	180	1550	2450 (15Pa)	1442	-22°F to 140°F	-30°C a 60°C	62	---	F	5,8	12,8
YWF4E-400S	220/1/50	0.82 ± 10%	180	1350	3500 (10Pa)	2060	-22°F to 140°F	-30°C a 60°C	65	---	F	6,7	14,8
	220/1/60	1.22 ± 10%	270	1510	3750 (10Pa)	2207	-22°F to 140°F	-30°C a 60°C	68	---	F	6,7	14,8
YWF4E-450S	220/1/60	1.50 ± 10%	330	1600	4750 (10Pa)	2796	-22°F to 140°F	-30°C a 60°C	68	---	F	8,2	18,1
YWF4E-500S	220/1/60	2.50 ± 10%	500	1450	6300 (10Pa)	3708	-22°F to 140°F	-30°C a 60°C	72	---	F	10,2	22,5
YWF4E-550S	220/1/60	3.30 ± 10%	725	1400	8100 (20Pa)	4767	-22°F to 140°F	-30°C a 60°C	75	---	F	13,0	28,7
YWF4E-600S	220/1/60	4.20 ± 10%	920	1600	9500 (20Pa)	5591	-22°F to 140°F	-30°C a 60°C	75	---	F	16,9	37,3
YWF4E-630S	220/1/60	5.34 ± 10%	1150	1500	10200 (20Pa)	6004	-22°F to 140°F	-30°C a 60°C	78	---	F	14,3	31,5
YWF4D-630S	230/3/60	2.5 ± 10%	900	1550	10900	6415	-22°F to 140°F	-30°C a 60°C	78	---	F	18	39,8
	440/3/60	1.65 ± 10%											

### IMAGES / IMAGENES

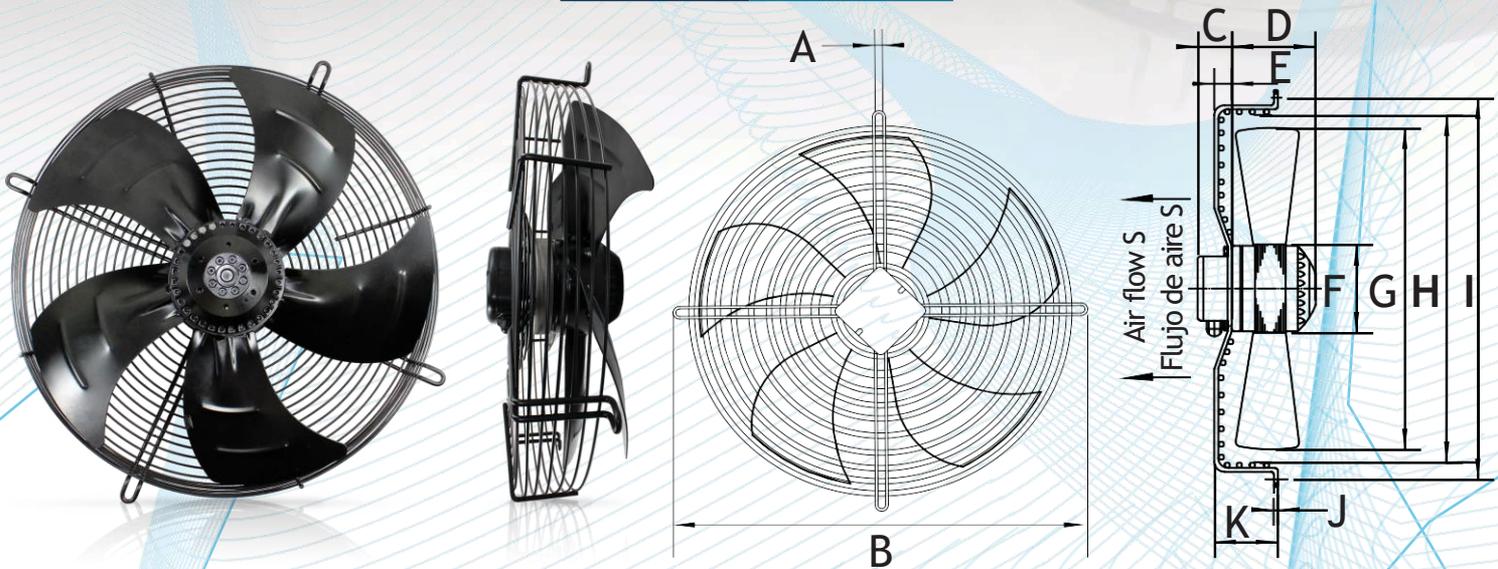

### DIMENSIONS / DIMENSIONES

Model Modelo	A		B		C		D		E		F		G		H		I		J		K	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
YWF4E-250S	7	1/4	320	12 5/8	60	2 3/8	76	3	30	1 1/8	92	3 5/8	250	9 7/8	275	10 7/8	320	12 3/5	4	1/8	60	2 3/8
YWF4E-300S	7	1/4	360	14 3/16	60	2 3/8	86	3 3/8	30	1 1/8	92	3 5/8	300	11 3/4	320	12 5/8	360	14 1/8	4	1/8	80	3 1/8
YWF4E-350S	9,5	3/8	422	16 5/8	60	2 3/8	104	4 1/16	30	1 1/8	102	4	350	13 3/4	370	14 5/8	422	16 5/8	5	1/5	80	3 1/8
YWF4E-400S	9,5	3/8	470	18 1/2	60	2 3/8	117	4 5/8	30	1 1/8	102	4	400	15 3/4	420	16 1/2	470	18 1/2	5	1/5	90	3 1/2
YWF4E-450S	9,5	3/8	522	20 9/16	60	2 3/8	130	5 1/8	30	1 1/8	102	4	450	17 3/4	470	18 1/2	522	20 1/2	6	1/4	90	3 1/2
YWF4E-500S	10,5	7/16	570	22 7/16	60	2 3/8	129	5 1/16	30	1 1/8	137	5 3/8	500	19 3/4	520	20 1/2	570	22 1/2	6	1/4	90	3 1/2
YWF4E-550S	10,5	7/16	622	24 1/2	60	2 3/8	144	5 11/16	30	1 1/8	137	5 3/8	550	21	570	22 1/2	620	24 3/8	6	1/4	100	4
YWF4E-600S	10,5	7/16	679	26 3/4	60	2 3/8	164	6 7/16	30	1 1/8	137	5 3/8	600	23 5/8	620	24 3/8	679	26 3/4	7,5	3/10	100	4
YWF4E-630S	10,5	7/16	750	29 1/2	60	2 3/8	164	6 7/16	30	1 1/8	137	5 3/8	630	24 3/4	650	25 5/8	750	29 1/2	7,5	3/10	100	4
YWF4D-630S	10,5	7/16	750	29 1/2	60	2 3/8	164	6 7/16	30	1 1/8	137	5 3/8	630	24 13/16	670	26 3/8	750	29 1/2	7,5	5/16	100	315/16

# EasyCold

Productos de refrigeración